

FORM PTO-1390 (Modified) (REV 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER <b>5035-112US</b>	
<b>TRANSMITTAL LETTER TO THE UNITED STATES</b> <b>DESIGNATED/ELECTED OFFICE (DO/EO/US)</b> <b>CONCERNING A FILING UNDER 35 U.S.C. 371</b>				U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5) <b>09/889306</b>	
INTERNATIONAL APPLICATION NO. <b>PCT/GB00/04339</b>		INTERNATIONAL FILING DATE <b>15 November 2000</b>		PRIORITY DATE CLAIMED <b>15 November 1999</b>	
TITLE OF INVENTION <b>REMOVABLE WIRELESS DEVICE</b>					
APPLICANT(S) FOR DO/EO/US <b>Lionel Wolovitz and Richard J. Horan</b>					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.</li> <li>4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</li> <li>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371 (c) (2))           <ol style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</li> <li>b. <input type="checkbox"/> has been communicated by the International Bureau.</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ol> </li> <li><input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> is attached hereto.</li> <li>b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</li> </ol> </li> <li><input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</li> <li>b. <input type="checkbox"/> have been communicated by the International Bureau.</li> <li>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li>d. <input checked="" type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li><input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li><input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).</li> <li><input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).</li> <li>11. <input type="checkbox"/> A copy of the International Preliminary Examination Report (PCT/IPEA/409).</li> <li>12. <input type="checkbox"/> A copy of the International Search Report (PCT/ISA/210).</li> </ol> <p><b>Items 13 to 20 below concern document(s) or information included:</b></p> <ol style="list-style-type: none"> <li>13. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li> <li>14. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</li> <li>15. <input checked="" type="checkbox"/> A <b>FIRST</b> preliminary amendment.</li> <li>16. <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment.</li> <li>17. <input checked="" type="checkbox"/> A substitute specification.</li> <li>18. <input type="checkbox"/> A change of power of attorney and/or address letter.</li> <li>19. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</li> <li>20. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</li> <li>21. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</li> <li>22. <input checked="" type="checkbox"/> Certificate of Mailing by Express Mail</li> <li>23. <input checked="" type="checkbox"/> Other items or information:</li> </ol>					
<b>PCT Notice Informing Applicant of the Communication of the International Application to the Designated Offices</b> <b>PCT Power of Attorney signed by Richard H. Horan</b>					

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5) <div style="font-size: 2em; font-weight: bold; margin-top: 5px;">097 889306</div>	INTERNATIONAL APPLICATION NO. <div style="font-weight: bold; margin-top: 5px;">PCT/GB00/04339</div>	ATTORNEY'S DOCKET NUMBER <div style="font-weight: bold; margin-top: 5px;">5035-112US</div>
--	--	---

24. The following fees are submitted: <b>BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5)) :</b>				CALCULATIONS    PTO USE ONLY	
<input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... <span style="float: right;">\$1000.00</span>					
<input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <span style="float: right;">\$860.00</span>					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <span style="float: right;">\$710.00</span>					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <span style="float: right;">\$690.00</span>					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <span style="float: right;">\$100.00</span>					
<b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>\$860.00</b>	
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than _____ months from the earliest claimed priority date (37 CFR 1.492 (e)). <span style="float: right;"><input type="checkbox"/> 20    <input type="checkbox"/> 30</span>				<b>\$0.00</b>	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	35    - 20 =	15	x    \$18.00	<b>\$270.00</b>	
Independent claims	5    - 3 =	2	x    \$80.00	<b>\$160.00</b>	
Multiple Dependent Claims (check if applicable). <span style="float: right;"><input type="checkbox"/></span>				<b>\$0.00</b>	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				<b>\$1,290.00</b>	
<input type="checkbox"/> Applicant claims small entity status. (See 37 CFR 1.27). The fees indicated above are reduced by 1/2.				<b>\$0.00</b>	
<b>SUBTOTAL =</b>				<b>\$1,290.00</b>	
Processing fee of <b>\$130.00</b> for furnishing the English translation later than _____ months from the earliest claimed priority date (37 CFR 1.492 (f)). <span style="float: right;"><input type="checkbox"/> 20    <input type="checkbox"/> 30</span>				<b>\$0.00</b>	
<b>TOTAL NATIONAL FEE =</b>				<b>\$1,290.00</b>	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <span style="float: right;"><input type="checkbox"/></span>				<b>\$0.00</b>	
<b>TOTAL FEES ENCLOSED =</b>				<b>\$1,290.00</b>	
				Amount to be: refunded	\$
				charged	\$

- a. ☒ A check in the amount of \$1,290.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 23-3040 A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Richard C. Woodbridge, Esq.  
 Woodbridge & Associates, P.C.  
 P.O. Box 592  
 Princeton, NJ 08542-0592

SIGNATURE  
 Richard C. Woodbridge  
 NAME  
 26,423  
 REGISTRATION NUMBER  
 July 13, 2001  
 DATE

JC18 Rec'd PCT/PTO 1 3 JUL 2001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

---

APPLICANT	LIONEL WOLOVITZ and RICHARD J. HORAN
TITLE	REMOVABLE WIRELESS DEVICE
FILING DATE	Herewith
INTERNATIONAL APPLICATION NO.	PCT/GB00/04339
INTERNATIONAL FILING DATE	15 November 2000
PRIORITY DATE	15 November 1999

---

ASSISTANT COMMISSIONER OF PATENTS  
WASHINGTON, D.C. 20231

**PRELIMINARY AMENDMENT**

Dear Sir:

Preliminary to a first office action on the merits of this application, please amend the published PCT specification and claims as follows:

**In the Specification:**

page 1, below the title      Please insert:

– CROSS REFERENCE TO RELATED APPLICATIONS

This application claims the priority of British application 9926984.7 filed 15 November 1999, British application 0000783.1 filed 14 January 2000, and PCT Application No. PCT/GB00/04339 filed 15 November 2000. –

- page 1, line 3 Please insert – BACKGROUND OF THE INVENTION –
- page 1, line 5 Please insert – 1. – before Field of the Invention
- page 1, line 15 Please delete “Prior Art Description” and insert instead  
– 2. – Description of the Prior Art –
- page 3, line 22 Please delete “Statement of the Present Invention” and in  
lieu thereof insert the following heading:  
– SUMMARY OF THE INVENTION –
- page 9, line 12 Please delete “Detailed Description” and insert the  
following:  
– DETAILED DESCRIPTION OF THE PREFERRED  
EMBODIMENT –
- page 9, line 14 Please insert the following paragraph:  
– During the course of this description, like numbers will be  
used to identify like elements according to the different  
views that illustrate the invention. –

**In the Claims:**

Please delete claims 1 through 35 in their entirety and insert instead the following claims:

– 36. A removable wireless device which is adapted to be insertable and fully removable from a computing device, the wireless device comprising:

- (i) an antenna;

- (ii) an analogue radio amplifier connected to the antenna;
- (iii) a platform on which the antenna and radio amplifier are mounted, the platform being retractable into a casing of the device when the antenna is not in use and extendable out of the casing to enable the antenna to operate effectively;

wherein the device further comprises one or more components, mounted on the platform, which perform a digital process.

37. The removable wireless device of Claim 36 in which a component mounted on the platform perform one or more of the following digital processes:

- (i) D/A conversion;
- (ii) Signal filtering;
- (iii) Modulation or demodulation;
- (iv) Channel coding or de-coding;
- (v) generating an analogue baseband signal;
- (vi) generating a digitized version of an analogue baseband signal.

38. The removable wireless device of Claim 37 in which one or more of the following components are mounted on the platform:

- (i) a baseband processor;
- (ii) a radio transceiver.

39. The removable wireless device of Claim 36 in which the platform comprises a printed circuit board.

40. The removable wireless device of Claim 39 in which electrical connections between the antenna and the or each component mounted on the platform are printed directly onto the printed circuit board on which the components and the antenna are mounted.

41. The removable wireless device of Claim 39 in which the antenna is printed directly onto the circuit board.

42. The removable wireless device of Claim 36 in which the platform slides within a PC Card casing.

43. The removable wireless device of Claim 36 in which the platform may slide out under the force of a spring ejection mechanism, the force of a motorized ejector or be capable of being extracted manually.

44. The removable wireless device of Claim 36 in which the device further comprises a sensor which detects the position of the platform and automatically switches the wireless device on if the platform is extended beyond a first position and automatically switches the wireless device off if the platform is retracted beyond a second position.

45. The removable wireless device of Claim 44 in which the sensor comprises a voltage sensing arrangement in which the voltage applied to a part of the platform varies depending on its position and the applied voltage can be measured to determine the position of the platform.

46. The removable wireless device as claimed in Claim 36 further including LEDs which are controlled to light up indicating the status or condition of the Card.

47. The removable wireless device of Claim 46 in which the LEDs are mounted distant from the antenna in order to minimize interference with the antenna and at least one light pipe carries light from the LEDs.

48. The removable wireless device of Claim 36 in which the platform is fully removable from the device to allow a new platform to be inserted into the device.

49. The removable wireless device of Claim 48 in which the removable platform enables an upgraded version of the platform to be inserted into the device.

50. A removable wireless device which is adapted to be insertable and fully removable from a computing device, the wireless device comprising:

- (i) an antenna;
  - (ii) an analogue radio amplifier connected to the antenna;
  - (iii) a platform on which the antenna and amplifier are mounted, the platform being retractable into a casing of the device when the antenna is not in use and extendable out of the casing to enable the antenna to operate effectively;
- wherein the device further comprises a sensor which detects the position of the platform and automatically switches the wireless device on if the platform is extended beyond a first position and automatically switches the wireless device off if the platform is retracted beyond a second position.

51. The removable wireless device of Claim 50 wherein the device further comprises one or more components mounted on the platform which perform digital processes.

52. The removable wireless device of Claim 50 in which a component mounted on the platform handles one or more of the following processes:

- (i) D/A conversion;
- (ii) Signal filtering;
- (iii) Modulation or demodulation;
- (iv) Channel coding or de-coding;
- (v) generating an analogue baseband signal;
- (vi) generating a digitized version of an analogue baseband signal.

53. The removable wireless device of Claim 52 in which one or more of the following components are mounted on the platform:

- (i) a baseband processor;
- (ii) a radio transceiver.

54. The removable wireless device of Claim 50 in which the platform comprises a printed circuit board.

55. The removable wireless device of Claim 54 in which electrical connections between the antenna and the or each component mounted on the platform are printed directly onto the printed circuit board on which the components and the antenna are mounted.

56. The removable wireless device of Claim 50 in which the antenna is printed directly onto the circuit board.

57. The removable wireless device of Claim 50 in which the platform slides within a PC Card casing.



58. The removable wireless device of Claim 50 in which the platform may slide out under the force of a spring ejection mechanism, the force of a motorized ejector or be capable of being extracted manually.

59. The removable wireless device of Claim 50 in which the sensor comprises a voltage sensing arrangement in which the voltage applied to a part of the platform varies depending on its position and the applied voltage can be measured to determine the position of the platform.

60. A PC Card including a removable platform on which is mounted at least one component, the platform being removable from the PC Card to allow replacement by a platform on which is mounted a replacement or upgraded component by sliding the platform out of an aperture on the PC Card.

61. The PC Card of Claim 60 in which the removable platform includes an antenna.

62. The PC Card of Claim 60 in which the removable platform includes a radio module.

63. The PC Card of Claim 60 in which the removable platform is readily disengageable from an electrical connector in the PC Card to allow a user to remove the platform from the PC Card.

64. The PC Card of Claim 60 in which the first removable platform forms is readily engageable with an electrical connector in the PC Card during assembly of the PC Card.

65. The PC Card of Claim 60 in which comb/track connectors or push fit electrical connectors are used to connect the removable platform with an interface in the PC Card to permanent PC Card components.

66. The PC Card of Claim 60 forming part of a modular system in which the PC Card includes a standard aperture able to receive platforms on which many different kinds of components can be mounted.

67. The PC Card of Claim 60 in which the one or more sides of the removable platform when fully inserted into a housing in the PC Card are flush with a surface of the PC Card.

68. A method of manufacturing a PC Card comprising the steps of:

- (a) mounting a removable component on a platform, the platform being removable from the PC Card by a user to allow replacement by a replacement or upgraded component;
- (b) sliding the platform into an aperture of the PC Card to engage with an electrical connector in the PC Card.

69. A method of upgrading the functionality of a PC Card comprising the following steps:

- (a) removing a component from the PC Card by sliding a platform on which that component is mounted out of an opening in the PC Card;
- (b) taking an upgraded component mounted on a further platform and sliding that further platform into the opening in the PC Card.

70. The method of Claim 69 whereby the action of sliding the platform out of the PC Card automatically electrically disengages the component. —

**REMARKS**

Applicant has amended the specification to include headings to conform to U.S. format.


The claims have been amended to avoid multiple dependencies thereby placing the application in better condition for examination and allowance.

If any additional amendments or changes are necessary, the Examiner is respectfully requested to contact applicants' attorney at the telephone number indicated below.

Respectfully submitted,

LIONEL WOLOVITZ and  
RICHARD J. HORAN

By



Richard C. Woodbridge  
Attorney for Applicant  
Reg. No. 26,423

Woodbridge & Associates, P.C.  
P.O. Box 592  
Princeton, NJ 08542-0592

Tel (609) 924-3773  
Fax (609) 924-1811

cc: Peter Langley, Esq.  
origin

11/PR TS

097 889306  
JC18 Rec'd PCT/PTO 1 3 JUL 2001

WO 01/37437

PCT/GB00/04339

## Removable Wireless Device

### 5 Field of the Invention

This invention relates to a removable wireless device which can be readily inserted into and entirely removed from a computing device. The term 'wireless device' used in this specification refers to any electronic device which includes a wireless reception and/or transmission capability, irrespective of whether or not other (e.g. wire based) forms of communications capabilities are also supported. Applicable wireless formats include, without limitation, the Bluetooth and 802.11 short range radio standards.

### 15 Prior Art Description

Providing a conventional notebook computer with wireless communications capabilities can be done in several ways, including for example, the use of a GSM PC Card inserted into the PC Card bay of the notebook computer. One design constraint affecting wireless devices is that an antenna generally has to protrude significantly from the wireless device casing, since that casing is usually metal and would therefore screen incoming and outgoing radiation. Hence, an antenna formed on a PC Card also has to extend significantly from the metal casing of the PC Card when in use.

25 This has led to three kinds of commercially manufactured antenna designs for wireless devices: first, antennas which are permanently connected to their associated radio receiver/transmitter hardware but are hinged and can fold out of a casing for use. An example of this would be a PC Card with a small hinged antenna which is hinged flush with the top of the PC Card when not in use, so that the antenna extends only slightly from the casing of the notebook computer into which the PC Card is inserted. FM radios typically

also use a hinged, telescopically extensible antenna. When wireless communications are required, the antenna can be hinged outwards and extended as required.

A second kind of design is an antenna which is removable when not in use but which can be readily connected for use. An example would be a clip-on antenna for a PC Card offering wireless capabilities: a small antenna connects to the PC Card body via a high quality electrical connector.

The third kind of antenna is the permanently fixed antenna, for example the stub antenna as commonly found on mobile telephones.

These approaches all have disadvantages: the hinges of hinged antenna can often be readily damaged; removable antenna can be too readily lost and permanently fixed antennas are susceptible to damage. Another disadvantage with conventional designs is that the electrical connectors leading from the antenna to the radio receiver/transmitter circuitry have to carry radio frequency signals with high integrity and are therefore relatively expensive, high quality components.

One solution which partly addresses some of these drawbacks is to include the antenna on a platform which can slide out of a PC Card casing. Because the antenna is mounted on a retractable platform, it is both robust when extracted, cannot be lost and may also be fully retractable within the casing when not in use. Reference may be made to US 5918163 and EP 0936694. In these designs, the circuitry which processes digital signals (e.g. including the baseband processor) is not included on the platform which can slide out, but is instead mounted on a PCB fixed inside the PC Card casing. Hence, this art explicitly teaches placing analogue components alone on the slide out platform.

Reference may also be made to US 5557288, which shows an antenna with associated analogue circuitry mounted on a platform which can be slid out of a portable computer casing. The antenna platform disclosed in this patent is not however entirely removable as such from the casing; instead it can merely slide out a short distance. This art therefore relates not to a PC Card type system which can readily be slotted into and withdrawn from a standard bay, but instead to a permanent, fixed structure in a computer. This art also explicitly teaches placing only analogue circuitry on the slide out platform, although the precise function performed by this circuitry is not made explicit.

The requirement to provide wireless communications capabilities to electronic devices will become increasingly important as wireless communications becomes ever more pervasive. For example, recent developments in technology, such as the 802.11 and Bluetooth standards for short range radio, offer the possibility of connecting devices such as PDAs and laptop computers into Pico nets or local areas networks; Bluetooth and 802.11 enabled computers and peripherals will likely become popular wireless devices, able to transmit and receive wireless data with other compatible equipment, such as other computers and peripherals. Antennas and radio transceivers which can work with 802.11 and Bluetooth signals require high integrity electrical connections, so that the conventional solutions would be particularly expensive because of the required high quality of the components.

### Summary of the Present Invention

In a first aspect of the invention, there is provided a removable wireless device which is adapted to be insertable and fully removable from a computing device, the wireless device comprising:

- (i) an antenna;
- (ii) an analogue radio amplifier connected to the antenna;

(iii) a platform on which the antenna and radio amplifier are mounted, the platform being retractable into a casing of the device when the antenna is not in use and extendable out of the casing to enable the antenna to operate effectively;

5 wherein the device further comprises one or more components, mounted on the platform, which perform a digital process.

By placing at least some of the circuitry which applies digital processes on the movable platform itself, significant manufacturing advantages can be obtained. For example, where the components perform digital processes such as signal detection or digital demodulation, then placing the components on a platform shared with the analogue radio amplifier (and generally also the radio transceiver) leads to the expensive co-axial connections otherwise needed to bring a radio signal to a radio transceiver placed in the body of the PC Card being entirely eliminated. More generally, the component mounted on the platform may perform one or more of the following digital processes:

- (i) D/A conversion;
- (ii) Signal filtering;
- (iii) Modulation or demodulation;
- (iv) Channel coding or de-coding;
- (v) Generating an analogue baseband signal;
- (vi) Generating a digitised version of an analogue baseband signal.

The component may be a baseband processor and/or a radio transceiver.

25 The term 'computing device' used in this patent specification should be expansively construed to cover any form of data handling device, including without limitation a portable computer, desktop computer, communications device, mobile telephone, desktop phone, smart phone or communicator.

The platform may be a printed circuit board. The platform need not be a single unitary piece: the only requirement is for the part of the platform on which the antenna is attached to be fixed relative to the part of the platform on which the circuitry handling at least some digital signal processes is mounted. An advantage of mounting the antenna on a PCB shared with the related analogue transceiving circuitry and also at least some of the circuitry which can process or handle digital signals is that the required electrical connections can for example be a simple rigid connection such as a connection printed directly onto the printed circuit board.

The baseband processor is typically connected via a data connector interface to the computing device via cheap and robust fixed tracks. No high integrity cabling needed to carry a wireless signal is therefore required at all in such an implementation. In one implementation, several chips (typically a physical interface, a baseband processor, a MAC (Media Access Controller) and RAM are all mounted on the retractable platform. Simple and relatively cheap fixed tracks or ribbon connectors then connect the MAC to a standard 68 way PCMCIA connector at the rear face of the card.

In a preferred embodiment, the platform slides within a PC Card casing conforming for example to a PCMCIA standard. The term 'PC Card' as used in this specification refers to any kind of small computer peripheral which can be placed into electrical engagement with a computer to provide directly or indirectly additional resources or functions for that computer or enable another connected device to use resources or functions of that computer. It includes cards such as PCMCIA cards, and CompactFlash (CF) cards, which are widely used with many different kinds of computer and offer a vast range of functionality, including voice and data communications, and memory expansion. PC Cards conform to precise physical and performance constraints and typically slot into a standard sized bay in a computer host.



Since PCMCIA card slots are so common in notebook and laptop PCs, this is a particularly convenient implementation since it means that a fully functional wireless radio device, for example a wireless LAN 802.11 or Bluetooth device, can be fitted to a wide range of computing devices. Conventional wireless LAN antennas are somewhat delicate and readily broken, so that the robust solution offered by this embodiment is an attractive one.

The card may slide out under the force of a spring ejection mechanism, have a motorised ejector or be merely pulled out manually.

In accordance with a second aspect of the present invention there is provided a removable wireless device which is adapted to be insertable and fully removable from a computing device, the wireless device comprising:

- (i) an antenna;
- (ii) an analogue radio amplifier connected to the antenna ;
- (iii) a platform on which the antenna and amplifier are mounted, the platform being retractable into a casing of the device when the antenna is not in use and extendable out of the casing to enable the antenna to operate effectively;

wherein the device further comprises a sensor which detects the position of the platform and automatically switches the wireless device on if the platform is extended beyond a first position and automatically switches the wireless device off if the platform is retracted beyond a second position.

Hence, this second aspect envisages a wireless device, which may be a PC Card format device, which automatically switches itself on and off depending on a sensed location of the extension of the antenna. Advantages of this approach are that (i) it does not require any software application to switch on/off the radio and (ii) the status of the radio is immediately visible to a user.

In accordance with a third aspect of the present invention, there is provided a PC Card including a removable platform on which is mounted at least one component, the platform being removable from the PC Card to allow replacement by a platform on which is mounted a replacement or upgraded component by sliding the platform out of an aperture on the PC Card.

Hence, this third aspect of the present invention is based on the fact that the PC Card can readily operate as a host or base for one or more components which provide important functionality or features for the computer to which the PC Card is itself connected. For example, as noted above, a PC Card could include a Bluetooth antenna and radio module as the removable component. Digital signal processing circuitry and memory might reside permanently in the PC Card or also be removable, depending on the economics of each option. When the requirement for a different or upgraded antenna and/or radio module arises, a user need only swap the replaceable, removable component with the upgraded antenna and/or radio module. This will be significantly cheaper for the consumer than replacing the entire PC Card. Many other different kinds of components could be included in a PC Card and therefore upgraded in this way.

A modular system of different removable components may be available: Having a PC Card with a standard aperture able to receive one of many different kinds of removable components, can significantly reduce manufacturing costs.

In a fourth aspect, there is a method of manufacturing a PC Card comprising the steps of:

- (a) mounting a removable component on a platform, the platform being removable from the PC Card by a user to allow replacement by a replacement or upgraded component;
- (b) sliding the platform into an aperture of the PC Card to engage with an electrical connector in the PC Card.

In a fifth aspect, there is a method of upgrading the functionality of a PC Card comprising the following steps:

- (a) removing a component from the PC Card by sliding a platform on which that component is mounted out of an opening in the PC Card;
- (b) taking an upgraded component mounted on a further platform and sliding that further platform into the opening in the PC Card.

Further details of each aspect are stated in the appended claims.

### Brief Description of the Drawings

The invention will be described with reference to the accompanying drawings, in which:

Figure 1 is an exploded perspective view of a PC Card implementation of the present invention with a radio transceiver and baseband processor modules and an antenna mounted on a platform retractable within the PC Card;

Figure 2 is a perspective internal view of the PC Card implementation with the platform fully extended;

Figure 3 is a perspective internal view of the PC Card implementation with the platform fully retracted;

Figure 4 is a perspective internal view of the PC Card implementation with the platform extended and showing the components fixed within the PC Card casing;

Figure 5 is a perspective internal view of the PC Card implementation with the platform retracted and showing the components fixed within the PC Card casing;

Figure 6 is a perspective external view of the PC Card implementation with the platform extended;

Figure 7 is a perspective external view of the PC Card implementation with the platform extended;

Figure 8 is a perspective external view of part of the PC Card implementation showing a part which prevents the platform from being readily fully retracted;

5 Figure 9 is a perspective external view of part of the PC Card implementation showing a part which prevents the platform from being readily fully retracted;

Figure 10 is a perspective view of connector tracks used in the PC Card implementation;

Figure 11 is a schematic of the electronic components used in the PC Card.

### Detailed Description

10 The detailed implementation shown in the attached figures is a PCMCIA format card which includes a 802.11 antenna, radio transceiver and baseband processor, all mounted on a platform which can slide in and out of the card casing. The card itself can be inserted into a standard PC Card bay in a laptop computer to give 802.11 standard short range radio connectivity for data transfer.

20 Referring now to **Figure 1**, the PC Card comprises a top metal cover **1** and a bottom metal cover **11**, which provide electromagnetic screening to the electrical components positioned within them. A plastic frame **4** sits between the two metal covers **1** and **11**; a fixed PCB **2** is positioned on frame **4** and includes at one end a standard PCMCIA 68 way connector **12**, which in use electrically connects the PC Card to the lap top computer (not shown). A  
25 grounding clip **3** is positioned on frame **4** such that when the PC Card is in use, it electrically contacts a grounded portion of the PCB **2** and also the top and bottom metal covers **1** and **11**, thereby grounding each of those covers **1** and **11**.

A radio transceiver PCB 9 is a platform which is arranged to slide in and out of frame 4 approximately 10mm, as shown more clearly in Figures 2 and 3. Radio transceiver PCB 9 has mounted upon it a radio transceiver unit 13; an inverted F antenna 14 and three LEDS 8 which indicate the functioning of the PC Card. Radio transceiver unit 13 is a Bluetooth radio chip such as the BlueCore01 from Cambridge Silicon radio. Many other vendors also supply Bluetooth radio chips; further information can be found at the Bluetooth.com web site. The Bluetooth radio is a digital radio operating at 2.4GHz. Figures 2 and 3 show respectively the assembled PC Card with the top cover 1 removed and the combined antenna/radio transceiver platform 9 fully extended and fully retracted. As can be seen, with the platform 9 fully extended, antenna 14 fully protrudes from the card, clear of the shielding offered by the metal covers.

Additional signal processing components are also mounted on the radio transceiver PCB 9, including a baseband processor and RAM. In some implementations, a single component including several discrete chips (e.g. RF transceiver, Baseband and link manager) may be useful. The Bluemoon component from Infineon AG is one such example. A top radio cover 5 and bottom radio cover 10 is positioned around the end of the radio transceiver PCB 9 which in use may extend out of the PC Card.

Inverted F antenna 14 is a slim and cheap form of printed antenna and is therefore very suitable for a slim, low cost product such as a 802.11 or Bluetooth PC Card. Antenna 14 is positioned at the outer edge of the radio transceiver PCB 9 so that it extends substantially from the top and bottom metal covers 1 and 11 when the platform, i.e. the radio transceiver PCB 9, is fully extended, as shown in Figures 2 and 7. LEDS 8 need to be visible at the front face of the radio transceiver PCB 9 but cannot overlie the antenna 14 since they and their leads would interfere with radio reception and transmission; LEDS 8 are therefore positioned back from the front face, but a light pipe 6 feeds light from them to the front face, as more clearly shown in Figures 2 and 3. LED(s) 8 are used in the antenna module to

indicate the status or condition of the device, for example the received signal strength, link status, and data flow. The LEDs 8 can be modulated in intensity (for example the stronger the received signal, the brighter the LED), or on/off duty cycle (for example the stronger the received signal, the more rapidly the LED blinks, or is on for longer). The LEDs 8 can for example pulse on for a short period each time a specified amount of data is transmitted or received. The user may specify which status each LED indicates and the means by which this is indicated. A combination of LEDs or multi-colour LED can be used to indicate status, for example colour could be varied from red, through orange to green could be used to indicated signal strength from none, weak through to strong.

A sliding connector 7 comprising a comb of eight metal fingers is positioned on the rear of the radio transceiver PCB 9; sliding connector 7 transfers digital signals to and from the signal processing circuitry on radio transceiver PCB 9, to the connector tracks 15, which are formed on the fixed PCB 2, as more clearly shown in Figures 4 and 5.

Figure 4 shows the PC Card from the rear; the holes of the PCMCIA 68 way connector 12 are clearly visible; these mate with pins located within the PC Card bay of the laptop computer (not shown). A PCMCIA interface chip 16, mounted on fixed PCB 2, is connected to 68 way connector 12 and receives digital signals passing along printed connector tracks 15 (and vice versa). Connector tracks 15 are in turn electrically connected to the 8 way sliding connector 7, as noted above.

As the platform 9 slides out of the PC Card, the 8 way sliding connector 7 slides along connector tracks 15, maintaining electrical contact. Electrical power to the radio transceiver 13 and other components on platform 9 passes through connector tracks 8 and sliding connector 7. Figure 10 shows the detail of one of the connector tracks 15 in more detail. A break 19 exists in one connector track; this enables a simple mechanism for sensing the position of the platform to be implemented as follows: different voltages are applied to the

track 15 on one side of the break 19 as compared to the other side of the break 19. The voltage picked up by the contacting comb of 8 way connector 7 will be different depending on which side of the break 19 it is positioned. Suitable signalling therefore enables the position of the platform 9 to be sensed so that when the platform is pulled out ready for operation, the PC Card is automatically switched on; when the platform is pushed back in, then the appropriate power down process is automatically initiated. This is useful for quick disabling as may be required, for example, on or when entering an aeroplane. The switch off is properly designed so that all appropriate switch off protocols are followed – e.g. remotely connected devices know that the device is being turned off in a controlled manner. One advantage of this approach is that it does not require any software application to switch on/off the radio and the status of the radio is immediately visible to a user.

When the antenna is to be used, it can be readily extended by the user gently pushing the front face of the radio covers 5 and 10. This causes a 1-way locking mechanism to be disengaged, allowing a spring mounted on frame 4 to push platform 9 out. Small stops on the platform 9 ensure that it is not extended too far. When the user wishes to turn the wireless device off, then the user simply pushes platform 9 back into the PC Card casing and 1-way locking mechanism engages again.

## 20 Upgradeability

It is generally desirable to make computer products alterable or upgradeable to allow for changes in the applicable technical standards, or to add new or enhanced features. These “upgrades” can sometimes be implemented by updating the program memory associated with the micro-processor implementing the standard (or protocols). In some devices the program memory consists of volatile RAM and is downloaded from a host computer each time the device is used. In others it consists of non-volatile memory, for example flash memory. This memory may be updated from the host computer. Some communications

products use program memory that does not facilitate upgrading, for example ROM (read-only memory).

5 A software upgrade may however sometimes be inapplicable. For example where radio circuitry designed for one standard is not able to conform to the different or higher data speed modulations of a new standard, then a product incorporating that radio circuitry can be rendered obsolete. Some limited forms of hardware upgradeability have been common in the computer field for many years; for example, RAM memory, hard drives and microprocessors can be swapped out and upgraded in many personal computers. However,  
10 engineering a product so that it is readily upgradeable can add significantly to the complexity of the product and hence its manufacturing cost. For many consumer electronics products, profit margins are already highly pressured, making it difficult to justify reducing the margins further by adding upgradeability features which may or may not be attractive to purchasers. The term 'upgraded component' denotes both a component with increased functionality  
15 and/or specification as well as a component with a merely different functionality and/or specification.

The present invention addresses this issue: When the slidable platform 9 is first mated into the PC Card frame 4 (typically during first manufacture or a user upgrade procedure), a  
20 simple sliding engagement is enough to cause an adequate electrical connection between connector comb 7 and connector tracks 15. Slidable platform 9 can be entirely withdrawn without any damage to the PC Card or the slidable platform 9. This is achieved as follows: a small spring feature 20 (shown in Figure 8) is present on the slidable platform 9. Feature 20 normally engages stop feature 21 (shown in Figure 9), positioned on frame 4, therefore  
25 preventing slidable platform 9 from being fully withdrawn from frame 4. However, a more forceful pull can cause the spring feature 20 to be pushed to one side, allowing the slidable platform 9 to be withdrawn past stop feature 21. A slidable platform 9 with upgraded



components (not shown) can then readily be slid into the frame 4, automatically engaging the connector tracks 15 when sufficiently inserted.

## 5 Signal Processing walk through

Figure 11 shows a simplified schematic of the main electronic components. As noted above, digital data is passed into a PCMCIA 68 way interface 12, controlled by PCMCIA interface 16. Digital data passes along fixed connector tracks 15 and is picked up by a sliding connector 7 which is fixed to slidable platform 9. Slidable platform 9 has mounted on it a baseband processor 30 as well as a radio transceiver chip 13, feeding an antenna 14. The detailed operation of such a system will be appreciated by a skilled radio systems implementer and will therefore only be described in outline here. The typical transmit sequence is as follows: source digital data is received at the baseband processor from the laptop. At the baseband processor, the following functions are carried out: first, channel coding occurs. In this process, the source digital data is multiplexed with forward error correction and framing bits. The purpose is to add redundancy to the information content so that bit errors can be detected in the receiver. A channel bitstream is generated as a result of the channel coding process. Digital modulation then occurs; the channel bitstream is merged to the signal samples which will be transmitted over the 2.4GHz air link. In Bluetooth, the GFSK digital modulation process occurs. The resultant signal is pulse shape filtered and then converted to analogue in a D/A converter. The analogue signal is then upconverted to the required frequency range and amplified to the required transmit power. The amplified signal is then passed to the antenna for transmission. The reception process is in essence the inverse of the above process.

The kind of components used to perform the above sequence can vary from implementation to implementation. For example, a baseband processor can be used to perform all steps up

to and including the D/A conversion, including link control and management functions, leaving the radio transceiver to perform solely the analogue signal processing functions of upconversion and amplification. In other implementations, the radio transceiver chip can itself perform significant digital signal processing tasks, such as modulation/demodulation; carry digital signals such as control logic signals (e.g. for controlling an amplifier); and perform digitally controlled power management tasks.

PCT/GB00/04339

**Claims**

1. A removable wireless device which is adapted to be insertable and fully removable from a computing device, the wireless device comprising:

5 (i) an antenna;  
(ii) an analogue radio amplifier connected to the antenna ;  
(iii) a platform on which the antenna and radio amplifier are mounted, the platform being retractable into a casing of the device when the antenna is not in use and extendable out of the casing to enable the antenna to operate effectively;  
10 wherein the device further comprises one or more components, mounted on the platform, which perform a digital process.

2. The removable wireless device of Claim 1 in which a component mounted on the platform perform one or more of the following digital processes:

15 (i) D/A conversion;  
(ii) Signal filtering;  
(iii) Modulation or demodulation;  
(iv) Channel coding or de-coding;  
20 (v) generating an analogue baseband signal;  
(vi) generating a digitised version of an analogue baseband signal.

3. The removable wireless device of Claim 2 in which one or more of the following components are mounted on the platform:

25 (i) a baseband processor;  
(ii) a radio transceiver.

4. The removable wireless device of any preceding Claim in which the platform comprises a printed circuit board.
5. The removable wireless device of Claim 4 in which electrical connections between the antenna and the or each component mounted on the platform are printed directly onto the printed circuit board on which the components and the antenna are mounted.
6. The removable wireless device of any preceding Claim in which the antenna is printed directly onto the circuit board.
7. The removable wireless device of any preceding claim in which the platform slides within a PC Card casing.
8. The removable wireless device of any preceding Claim in which the platform may slide out under the force of a spring ejection mechanism, the force of a motorised ejector or be capable of being extracted manually.
9. The removable wireless device of any preceding Claim in which the device further comprises a sensor which detects the position of the platform and automatically switches the wireless device on if the platform is extended beyond a first position and automatically switches the wireless device off if the platform is retracted beyond a second position.
10. The removable wireless device of Claim 9 in which the sensor comprises a voltage sensing arrangement in which the voltage applied to a part of the platform varies depending on its position and the applied voltage can be measured to determine the position of the platform.

11. The removable wireless device as claimed in any preceding Claim further including LEDs which are controlled to light up indicating the status or condition of the Card.
- 5 12. The removable wireless device of Claim 11 in which the LEDs are mounted distant from the antenna in order to minimise interference with the antenna and at least one light pipe carries light from the LEDS.
- 10 13. The removable wireless device of any preceding Claim in which the platform is fully removable from the device to allow a new platform to be inserted into the device.
14. The removable wireless device of Claim 13 in which the removable platform enables an upgraded version of the platform to be inserted into the device.
- 15 15. A removable wireless device which is adapted to be insertable and fully removable from a computing device, the wireless device comprising:
- (i) an antenna;
  - (ii) an analogue radio amplifier connected to the antenna;
  - (iii) a platform on which the antenna and amplifier are mounted, the platform being retractable into a casing of the device when the antenna is not in use and extendable out of the casing to enable the antenna to operate effectively;
- 20 wherein the device further comprises a sensor which detects the position of the platform and automatically switches the wireless device on if the platform is extended beyond a first position and automatically switches the wireless device off if the platform is retracted beyond a second position.
- 25 16. The removable wireless device of Claim 15 wherein the device further comprises one or more components mounted on the platform which perform digital processes.

17. The removable wireless device of Claim 15 or 16 in which a component mounted on the platform handles one or more of the following processes:

- (i) D/A conversion;
- (ii) Signal filtering;
- (iii) Modulation or demodulation;
- (iv) Channel coding or de-coding;
- (v) generating an analogue baseband signal;
- (vi) generating a digitised version of an analogue baseband signal.

18. The removable wireless device of Claim 17 in which one or more of the following components are mounted on the platform:

- (i) a baseband processor;
- (ii) a radio transceiver.

19. The removable wireless device of any preceding Claim 15 – 18 in which the platform comprises a printed circuit board.

20. The removable wireless device of any preceding Claim 15 – 19 in which electrical connections between the antenna and the or each component mounted on the platform are printed directly onto the printed circuit board on which the components and the antenna are mounted.

21. The removable wireless device of any preceding Claim 15 - 20 in which the antenna is printed directly onto the circuit board.

22. The removable wireless device of any preceding Claim 15 - 21 in which the platform slides within a PC Card casing.
- 5 23. The removable wireless device of any preceding Claim 15 - 22 in which the platform may slide out under the force of a spring ejection mechanism, the force of a motorised ejector or be capable of being extracted manually.
- 10 24. The removable wireless device of Claim 15 - 23 in which the sensor comprises a voltage sensing arrangement in which the voltage applied to a part of the platform varies depending on its position and the applied voltage can be measured to determine the position of the platform.
- 15 25. A PC Card including a removable platform on which is mounted at least one component, the platform being removable from the PC Card to allow replacement by a platform on which is mounted a replacement or upgraded component by sliding the platform out of an aperture on the PC Card.
- 20 26. The PC Card of Claim 25 in which the removable platform includes an antenna.
27. The PC Card of Claim 25 or 26 in which the removable platform includes a radio module.
- 25 28. The PC Card of any preceding Claim 25 - 27 in which the removable platform is readily disengageable from an electrical connector in the PC Card to allow a user to remove the platform from the PC Card.


29. The PC Card of any preceding Claim 25 – 28 in which the first removable platform forms is readily engageable with an electrical connector in the PC Card during assembly of the PC Card.
- 5 30. The PC Card of any preceding Claim 25 – 29 in which comb/track connectors or push fit electrical connectors are used to connect the removable platform with an interface in the PC Card to permanent PC Card components.
- 10 31. The PC Card of any preceding Claim 25 – 30 forming part of a modular system in which the PC Card includes a standard aperture able to receive platforms on which many different kinds of components can be mounted.
- 15 32. The PC Card of any preceding Claim 25 – 31 in which the one or more sides of the removable platform when fully inserted into a housing in the PC Card are flush with a surface of the PC Card.
- 20 33. A method of manufacturing a PC Card comprising the steps of:  
(a) mounting a removable component on a platform, the platform being removable from the PC Card by a user to allow replacement by a replacement or upgraded component;  
(b) sliding the platform into an aperture of the PC Card to engage with an electrical connector in the PC Card.
- 25 34. A method of upgrading the functionality of a PC Card comprising the following steps:  
(a) removing a component from the PC Card by sliding a platform on which that component is mounted out of an opening in the PC Card;




(b) taking an upgraded component mounted on a further platform and sliding that further platform into the opening in the PC Card.


35. The method of Claim 34 whereby the action of sliding the platform out of the PC  
5 Card automatically electrically disengages the component.

09069306 17191  
PCT/GB 00/04339

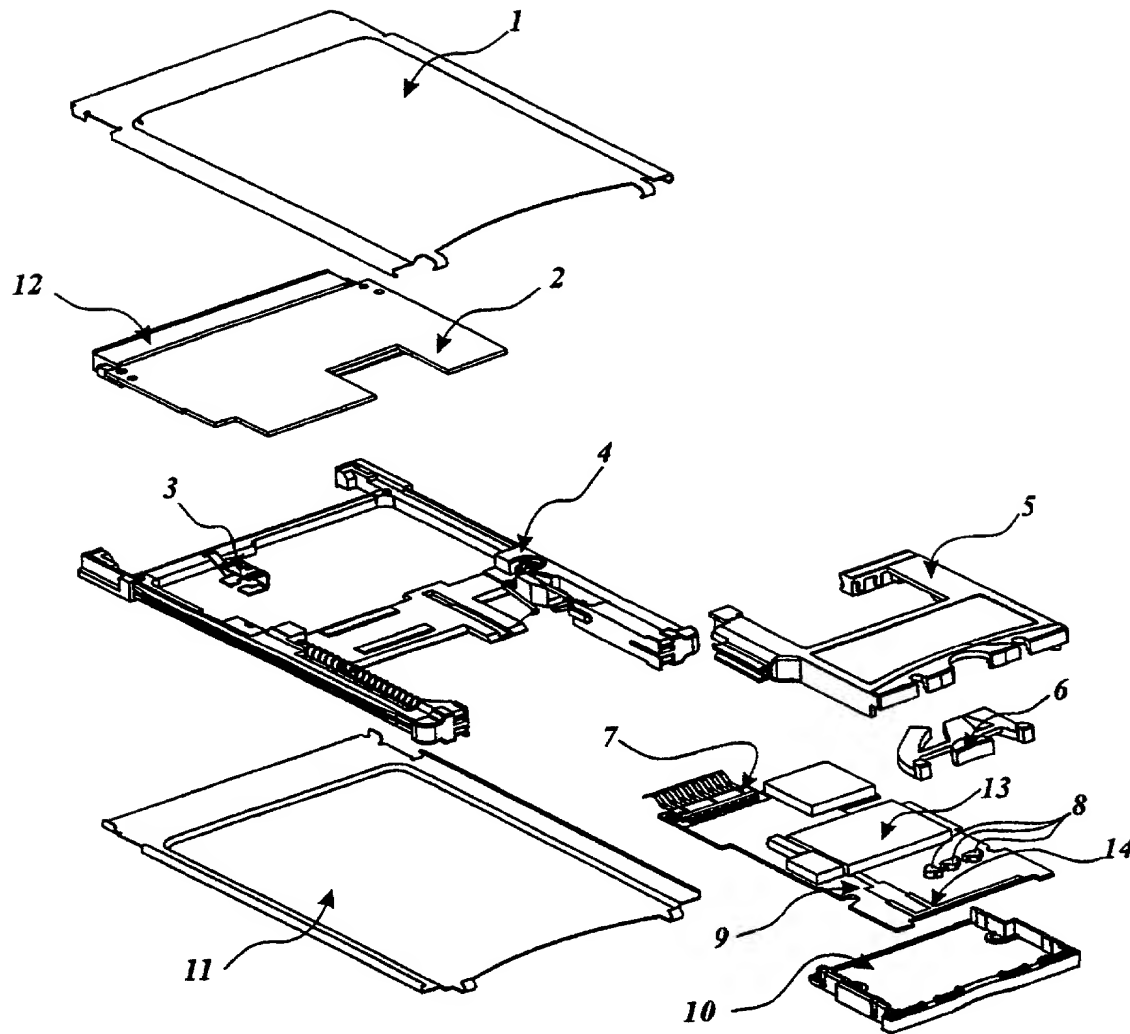
*Fig. 1*

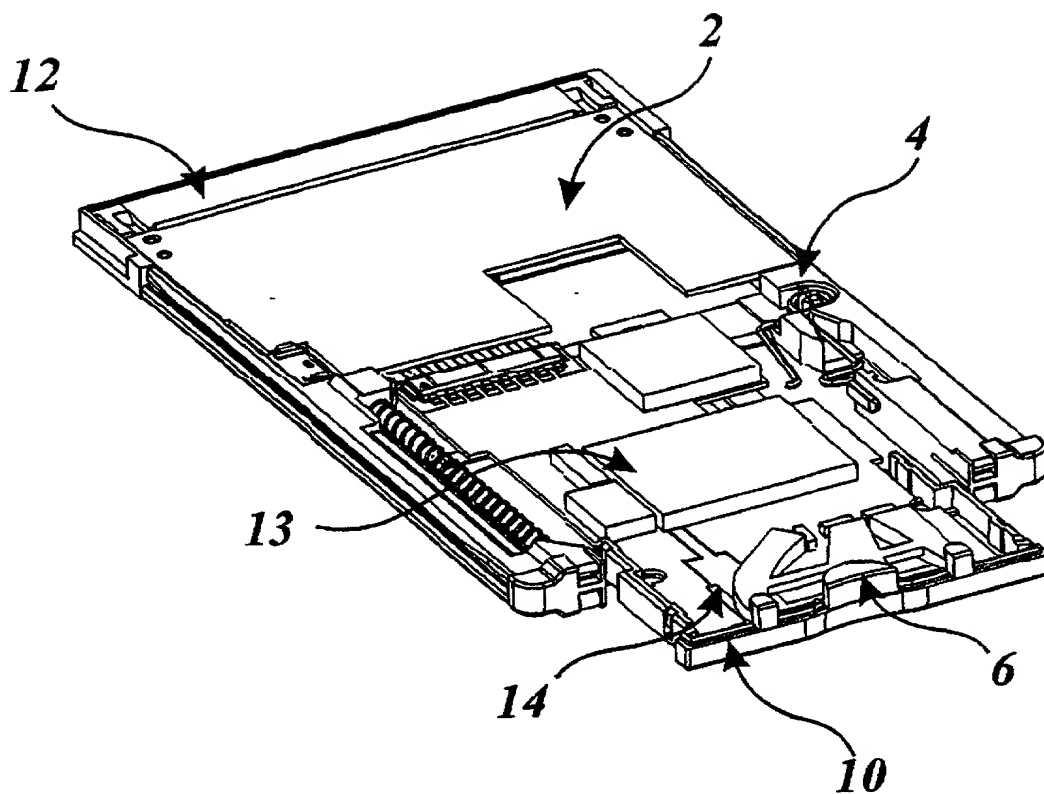


**Fig. 2**

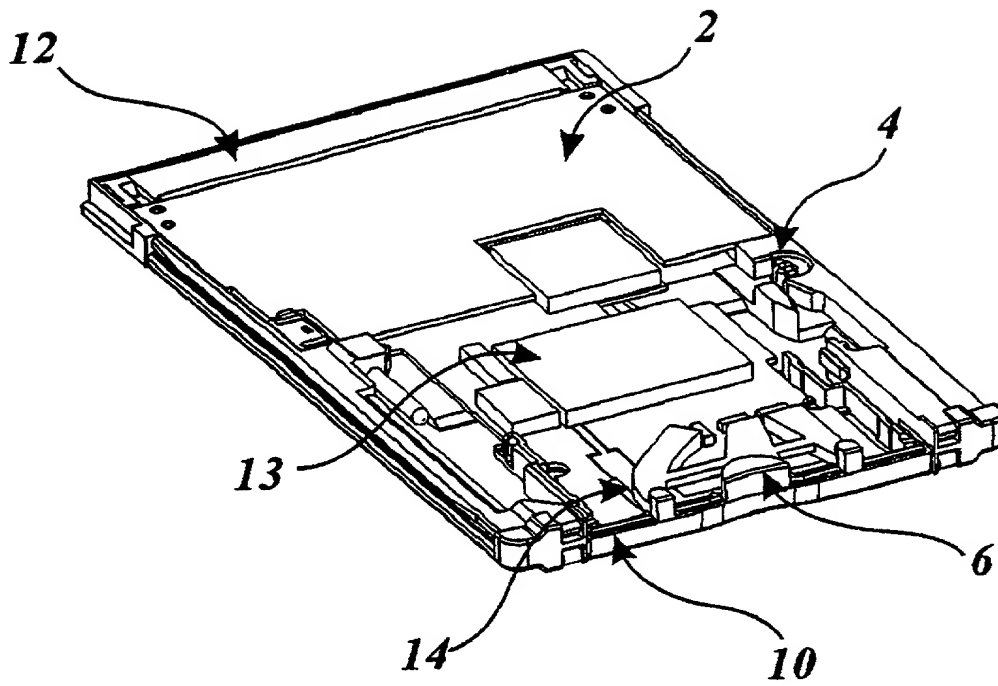*Fig. 3*


4/11

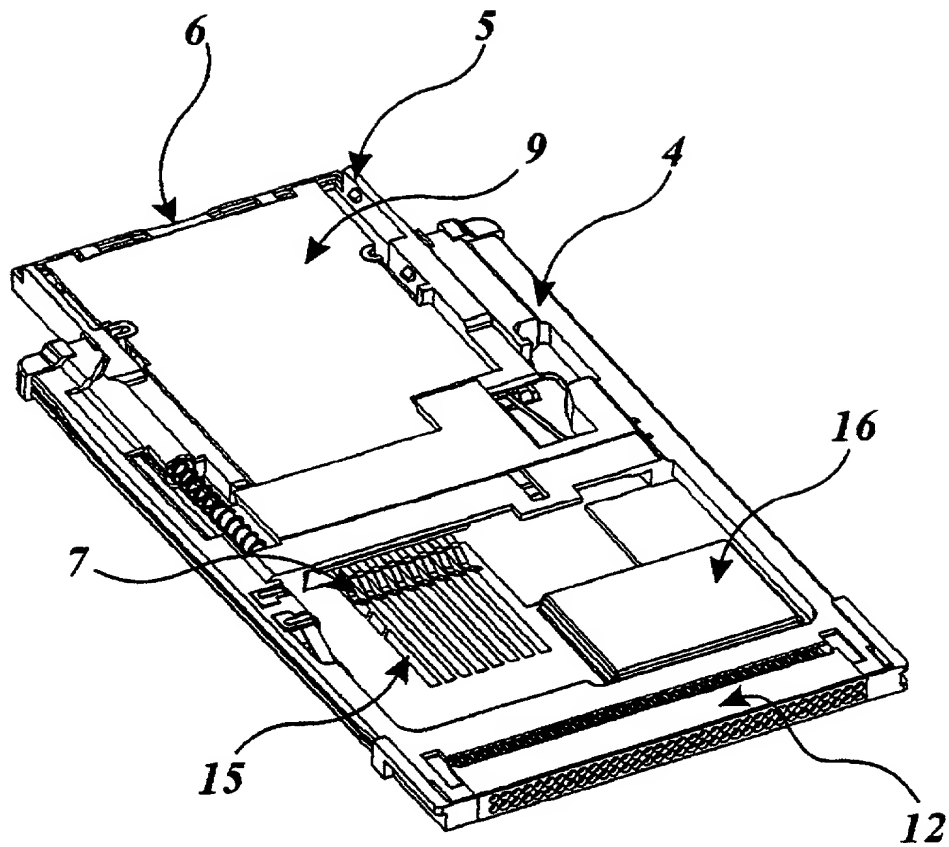*Fig. 4*

5/11

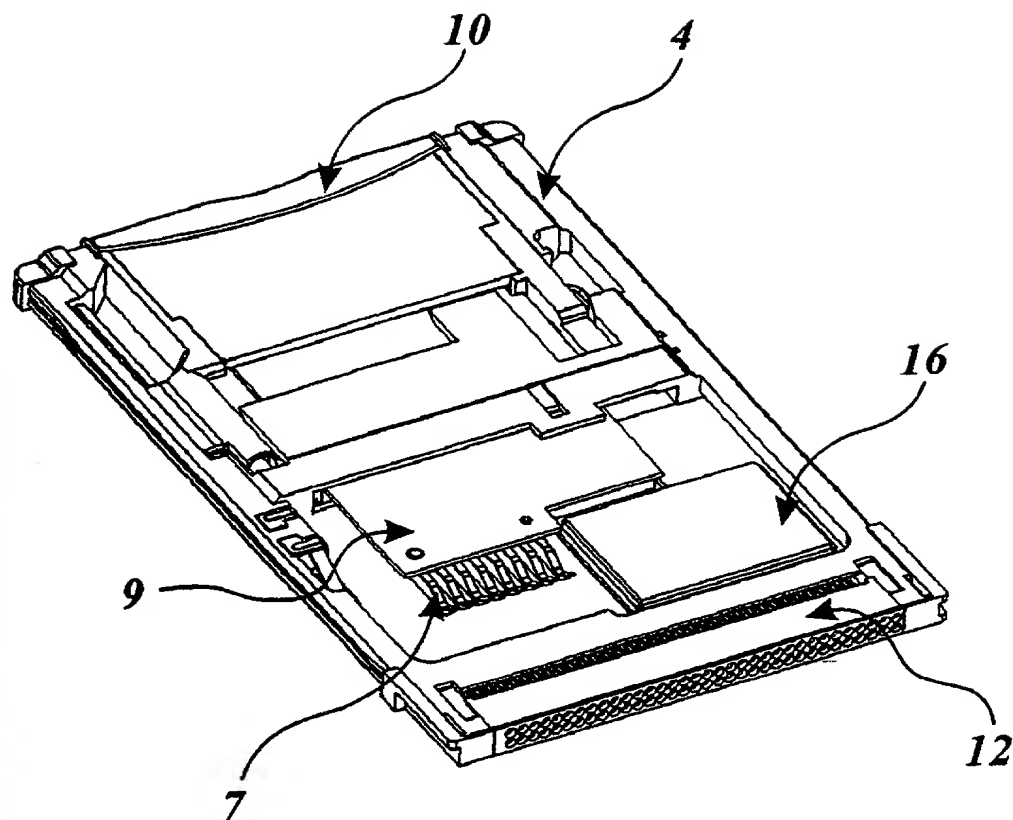
*Fig. 5*

6/11

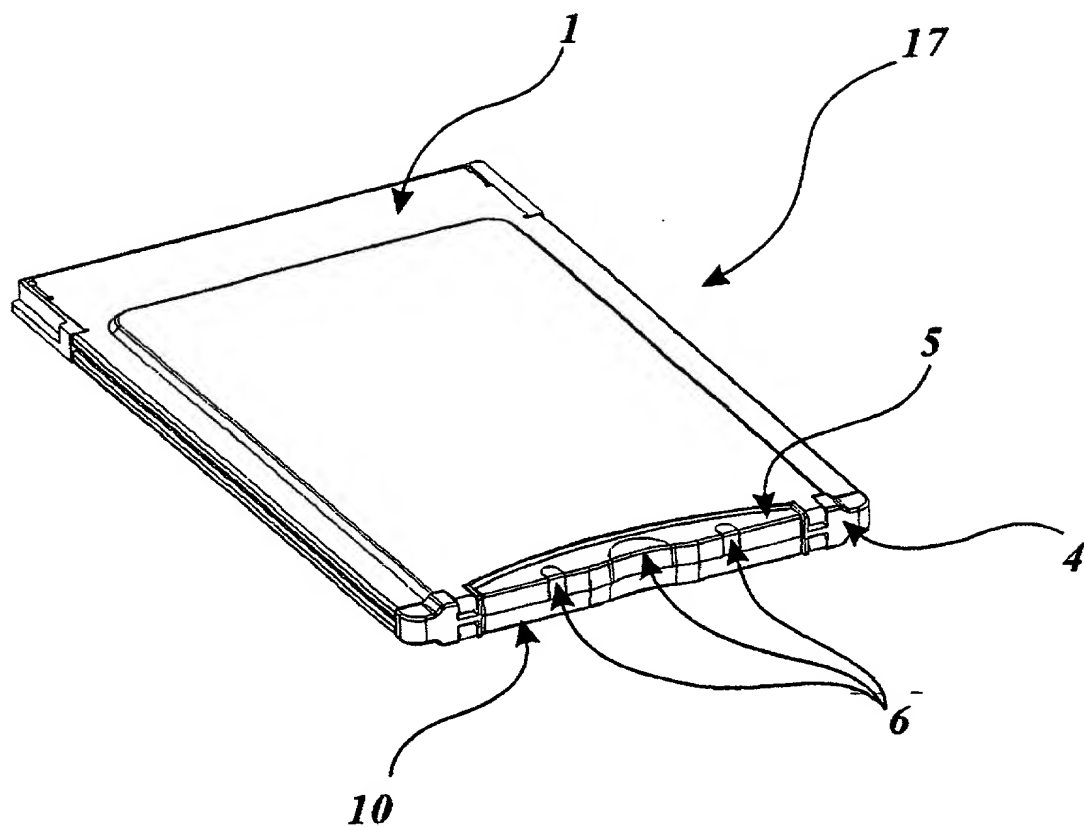

**Fig. 6**


7/11

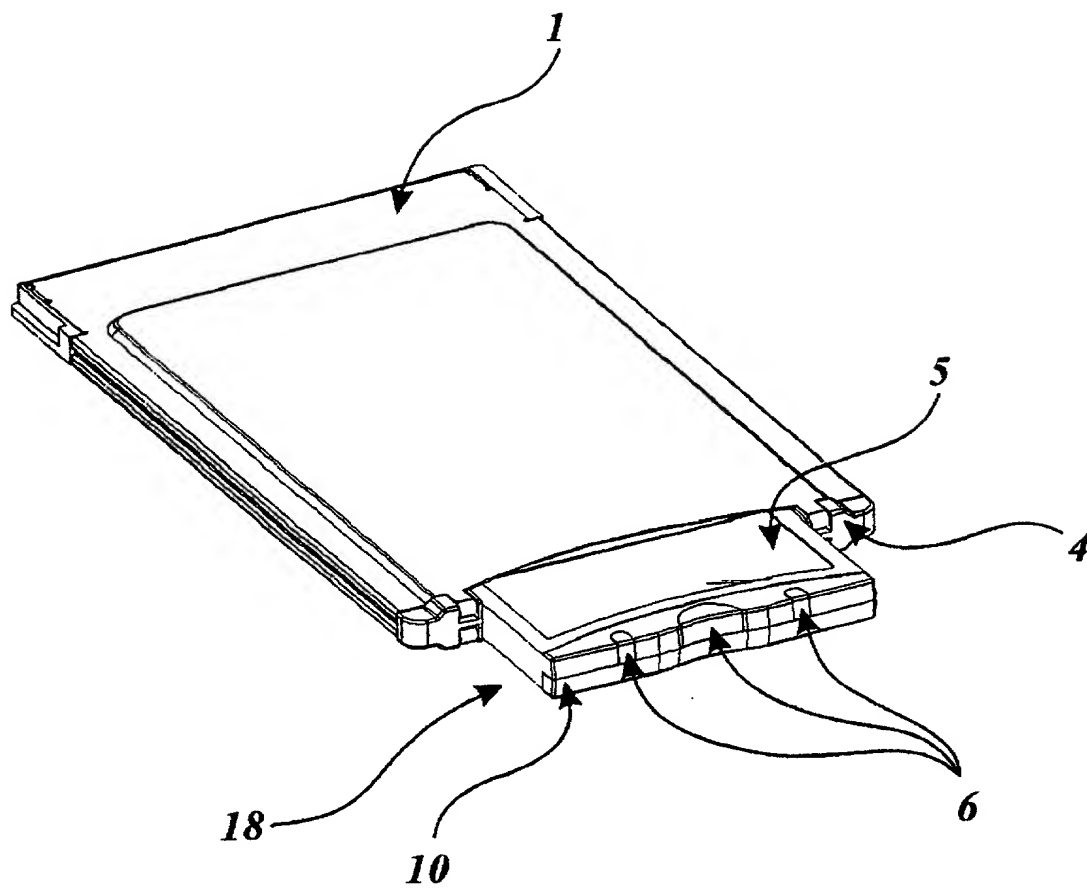


**Fig. 7**



8/11

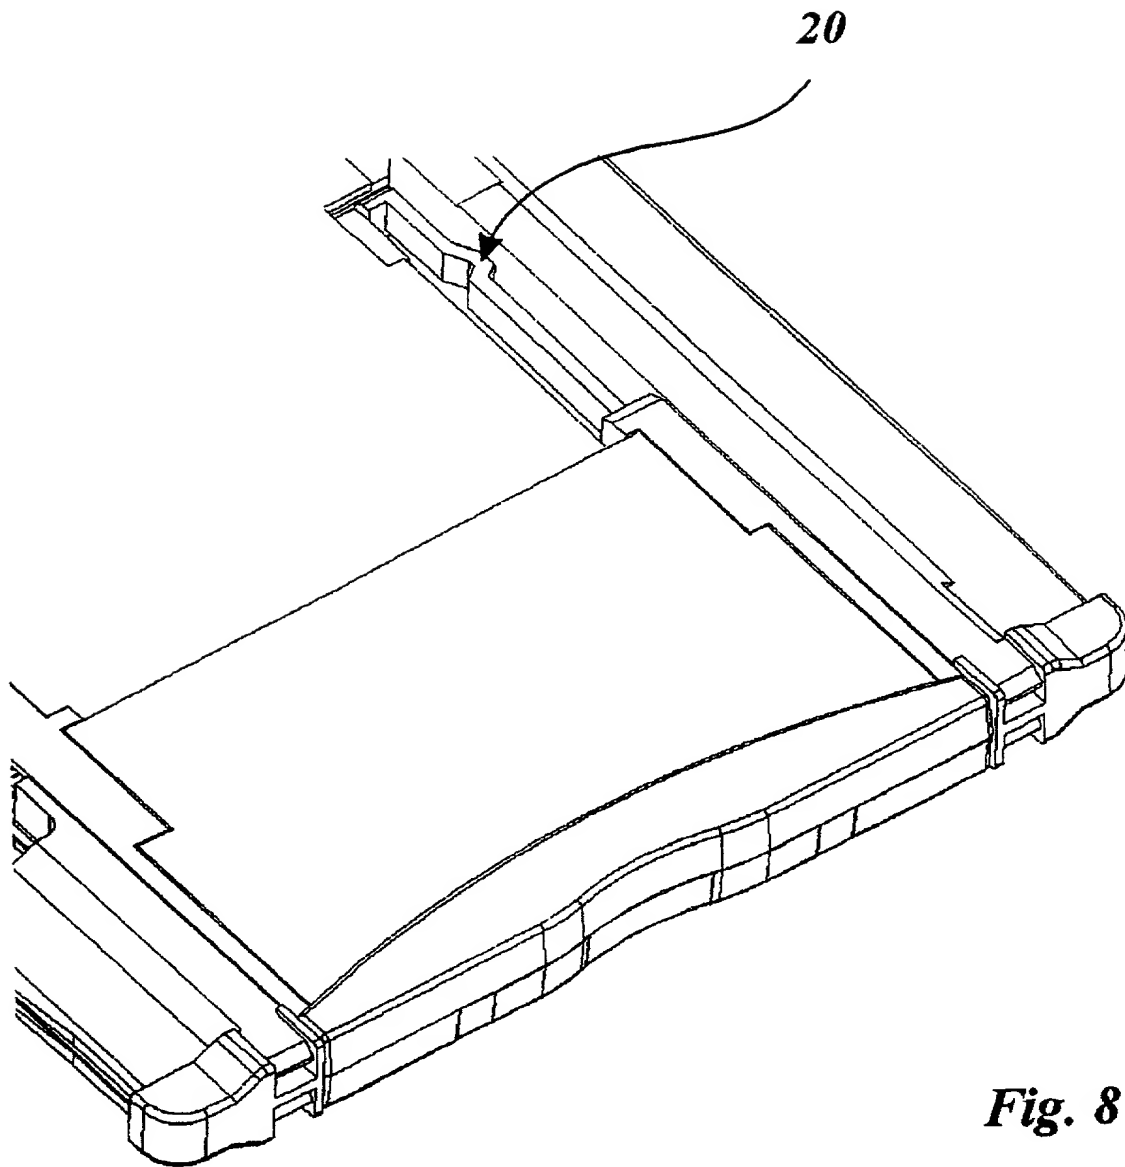**Fig. 8**

9/11

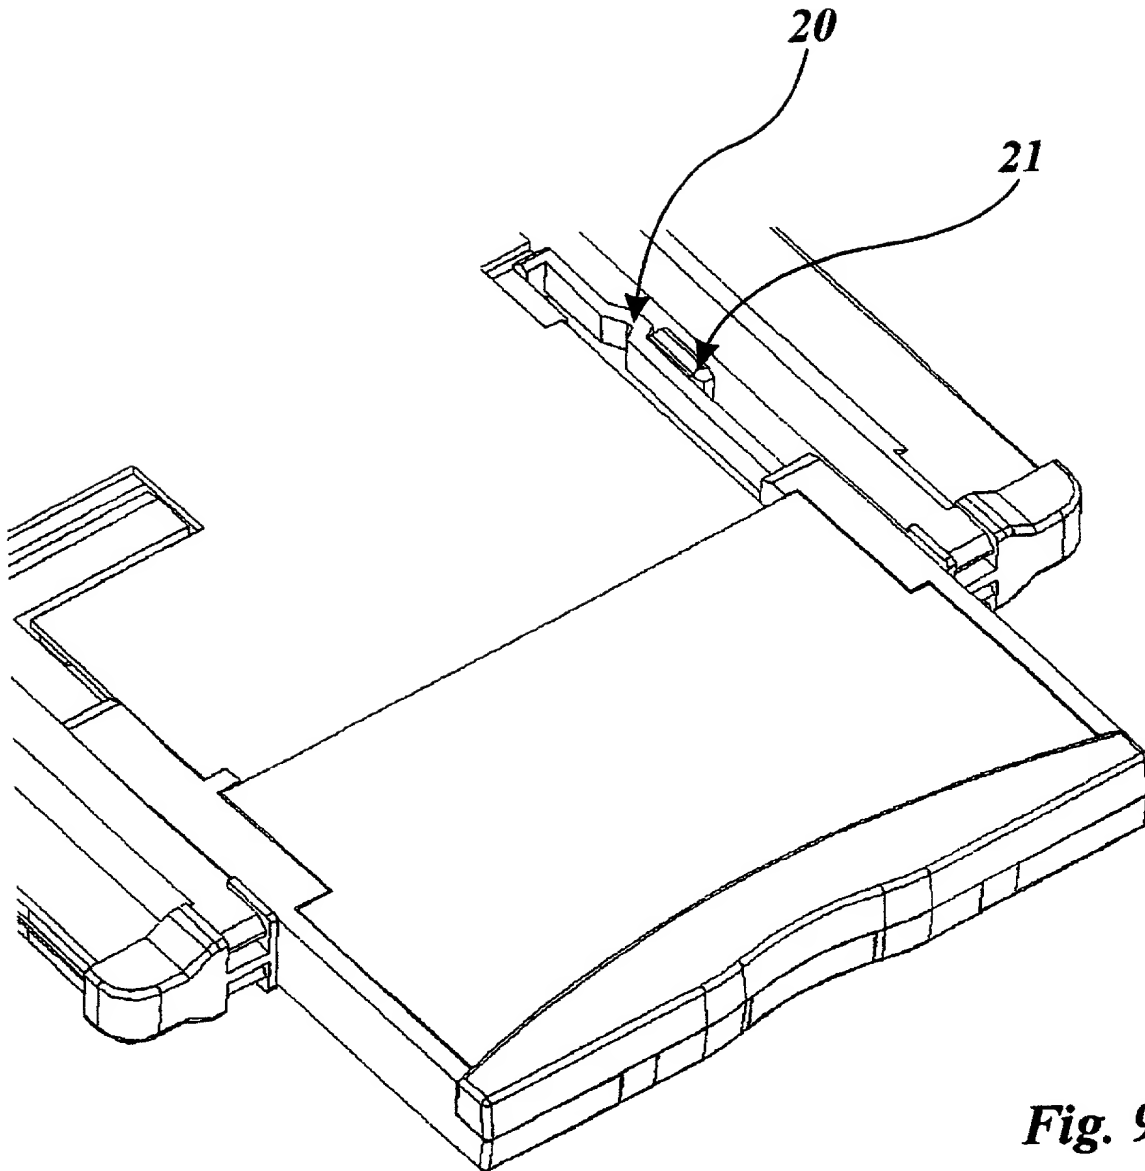**Fig. 9**

10/11


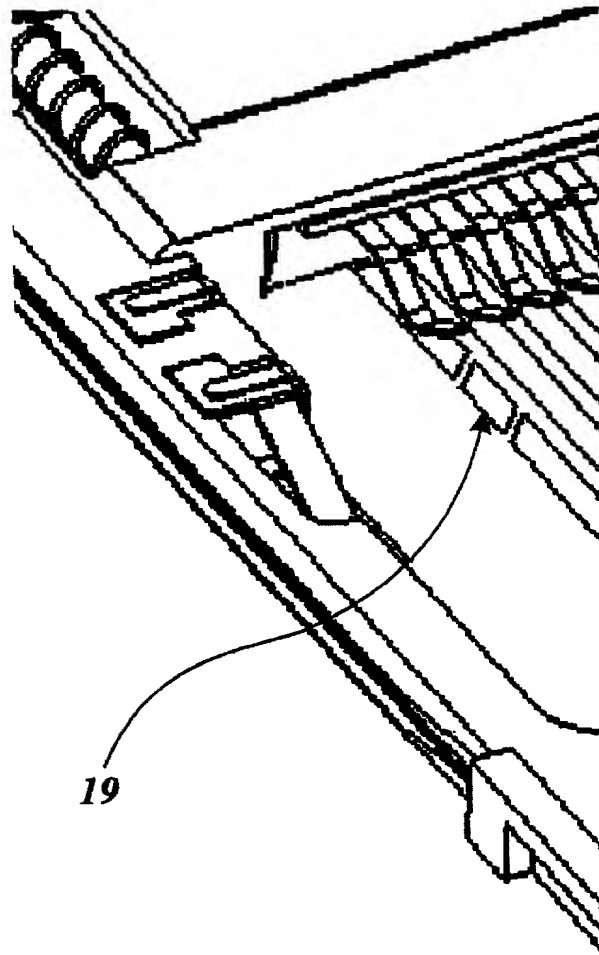
*Fig 10*

Figure 11

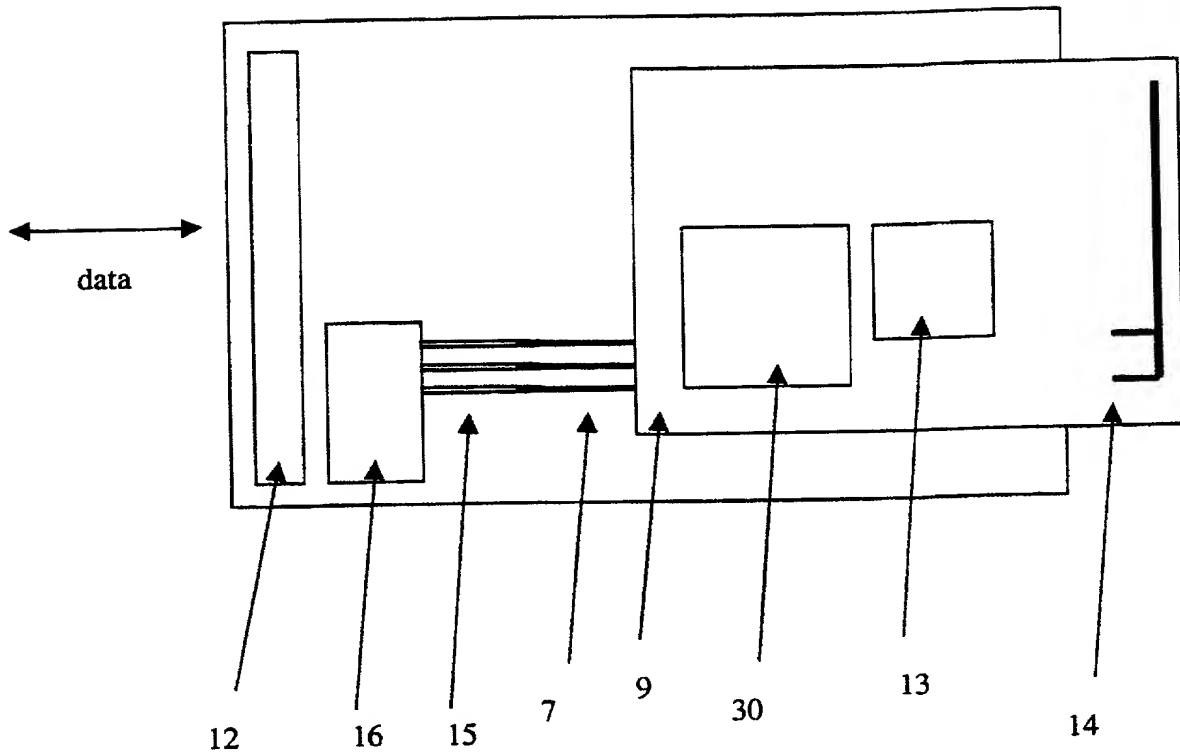

**Power of Attorney**  
**(Concerning a Given International Application)**  
**Patent Co-operation Treaty**  
**Appointment of Agent or Common Representative**

The undersigned applicant

Richard J. Horan  
246 Beach 127<sup>th</sup> Street  
Belle Harbor,  
New York 11694  
US

hereby appoints

Origin Limited  
52 Muswell Hill Road  
London  
N10 3JR  
GB



as agent

to act on his (her/its) behalf before the competent International Authorities in connection with the International Application having:

Title: Removable Wireless Device

International Application No.: PCT/GB00/04339

filed with the UK Patent Office as receiving office and to make or receive payment on his (her/its) behalf.

Place:.....

New York NY  
USA.

Date:.....

JUNE 25, 2001

Signature:



Docket No  
5035-112US

## Declaration and Power of Attorney For Patent Application

### English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

#### REMOVABLE WIRELESS DEVICE

The specification of which

(check one)

☐

is attached hereto.

☒

was filed on **November 15, 2000** as United States Application No. or PCT International Application Number **PCT/GB00/04339** and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed

Prior Foreign Application(s)

Priority Not Claimed

9926984.7

(Number)

GB

(Country)

15.11.99

(Day/Month/Year Filed)

☐

0000783.1

(Number)

GB

(Country)


14.01.00

(Day/Month/Year Filed)

☐

0989306 07101





**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

**Richard C. Woodbridge**

**26,423**

**Stuart H. Nigam**

33,541

## Charles Manero

**46,896**

## Michael Condon

**46,435**

**Send Correspondence to:**

**Richard C. Woodbridge Esq.**  
**Woodbridge & Associates P.C.**  
**P.O. Box 592**  
**Princeton, NJ 08542-0592**

Direct Telephone Calls to:

*(name and telephone number)*  
**Richard C. Woodbridge - 609-924-3773**

Full name of sole or first inventor

## Lionel Wolovitz

First or sole inventor's signature \_\_\_\_\_

Date \_\_\_\_\_

### Residence

**West Wing, Sandhill House, Middle Claydon, Bucks MK18 2LD, Great Britain**

## Cicereños

## British

Post Office Address

**West Wing, Sandhill House, Middle Claydon, Bucks MK18 2LD, Great Britain**

Full name of second inventor, if any

**Richard J. Horan**

Second inventor's signature

Date \_\_\_\_\_

July 10, 2001

### Residence

246 Beach 127<sup>th</sup> Street, Belle Harbor, New York 11694, US

## Citizenship

US

**Post Office Address**

**Post Office Address**  
**246 Beach 127<sup>th</sup> Street, Belle Harbor, New York 11694, US**